

REQUEST ORDER:

2558

DISTRIBUTOR:

QCS

SITE:

Paducah Ky.

CONVEYOR NUMBER:

ROLL MANUFACTURER:

Continental

FRAME MANUFACTURER:

Same

BELT WIDTH:

IN.

48

MM

BELT SPEED:

TONS PER HOUR:

SITE CONTACT NAME:

Austin Diericx

SITE NUMBER:

Holcim 3 Rivers (Smithland Ky)

ROLL PERFORMANCE INTEREST:

☒ WEAR LIFE

☐ NOISE

☒ WEIGHT

☐ RECYCLABILITY

☐ POWER CONSUMPTION

☐ CORROSION

ROLL LOCATION: (Select one)

☒ EQUAL TROUGH

☐ CENTER TROUGH

☐ WING TROUGH

☐ FLAT RETURN

☐ VEE RETURN

ROLL CEMA RATING: (Select one)

☐ B

☐ C

☒ D

☐ E

☐ F

FRAME TROUGHING ANGLE: (Select one)

☐ 20%

☒ 35%

☐ 45%

☐ OTHER

ROLLER OPERATING TEMPERATURE RANGE

☐ Less than -22°F (-30°C)

☐ Between -22°F (-30°C) and 140°F (60°C)

☐ Above 140°F (60°C)

SPACING BETWEEN FRAMES

4 ft.

MATERIAL CONVEYED

6" minus aggregate


LENGTH OF TRIAL/TEST

ROLL QUANTITY

25

ROLLER DIMENSIONS:

	INCHES	MILLIMETERS
1	17.125	
2		
3	18	
4		
5	6	

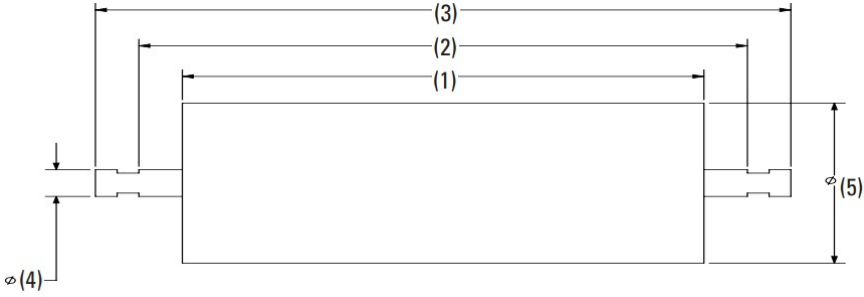

SHAFT END DETAILS—TYPE: (Select one)

☐ A

☐ B

☐ C

☐ D

☐ F

☐ G


☐ H

☐ J


☐ K

☐ L


DIMENSIONS	INCHES	MILLIMETERS
F	.31	
G	.25	
H	1.12	
I	1.25	
J	.75	

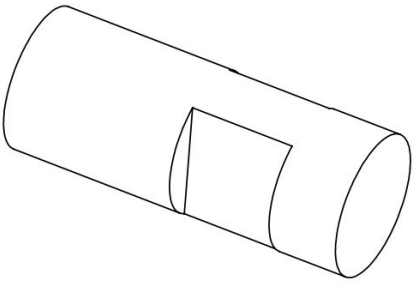


TYPE—A




TYPE—B

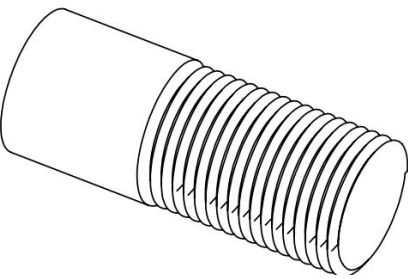


TYPE—C




TYPE—D

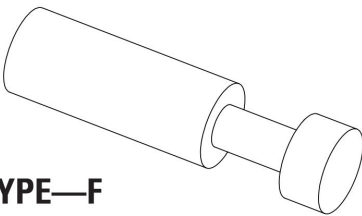


TYPE—F




TYPE—G




TYPE—H



TYPE—J



TYPE—K



TYPE—L

NOTES